





**User manual
Rev 3**

MAY 2026



Thank you

Thank you for choosing the DAVINCI ZERO Harness.

The ZERO is designed for paragliding accuracy competition. Its optimized shape minimizes ground contact, provides excellent balance for a stable final landing, and allows for free leg movement. It is also designed to effectively protect the pilot from impacts in unexpected situations.

Although certified to EN 1651 and LTF NfL II 91/09, paragliding is a dangerous sport that can result in injury, disability, and even death. To minimize risks for pilots, DAVINCI invests heavily in research and development. The result is a suite of innovative DAVINCI technologies, including a foam protection system, a rescue parachute handle with improved visibility, a clean zipper design, and a modern design. Enjoy a comfortable and safe flight with the ZERO.

-DAVINCI Gliders team-





WARNING!

THIS IS NOT A TRAINING MANUAL. ATTEMPTING TO FLY THIS OR ANY OTHER PARAGLIDER WITHOUT PROPER INSTRUCTION FROM A CERTIFIED PROFESSIONAL INSTRUCTOR IS EXTREMELY DANGEROUS TO YOURSELF AND BYSTANDERS.

DAVINCI GLIDERS are carefully manufactured and inspected at the factory. Please use this harness only as described in this manual.

Do not make any modifications to the harnesses.

As with any sport – without taking the necessary safety precautions, paragliding can be dangerous.



Contents

Thank you	4
Warning	5
Introducing the ZERO	7
Components and Features	8
Before you fly	9
Connecting the carabiner	9
Installing the speed system	10
Rescue Installation and compatibility check	11
Attaching the rescue container bag to the harness rescue parachute handle.....	12
The rescue deployment bag and the harness deployment handle.....	13
Connecting the rescue bridle	15
Rescue installation guide	16
Adjustments	18
Shoulder straps	19
Lateral Straps	20
Chest straps	21
Lumbar Strap	22
Leg Strap	23
Flying with the ZERO	24
General warnings and advice	24
Pre-flight checks	24
Landing with the ZERO	24
Miscellaneous	25
Maintenance and repairs	26
Activate the reserve parachute	28
Materials	29



Introducing the Harness

Harness spec	XS	S	M	L
Height (cm)	150-160	160-170	170-180	175-195
Seat width (mm)	310	320	330	350
Weight (kg)	50-65	60-75	70-85	85-117
Height of Suspension Point (mm)	430	440	450	470
Harness Weight (kg)	2.7	2.8	2.9	3.0
Back protection type	FOAM			
Min/Max container volume (cm3)	3000-6500			

Certification

The ZERO has EN 1651 and LTF NfLII 91/09 certification, max load 117 kg



Components and Features

Components

1. Harness
2. 30mm Aluminum Aluminum Carabiner
3. Rescue handle+Inner container
4. Speedbar system



1. Harness



2. 30mm Aluminum Carabiners



3. Rescue handle+Inner container



4. Speed bar system




Before you fly

Double check that your dealer has checked the integrity and basic settings of the harness. The harness should be assembled by a qualified paragliding instructor.

- **Connecting the carabiner**

Before your flight, you have to make sure the harness is connected to the carabiner as shown in the picture.

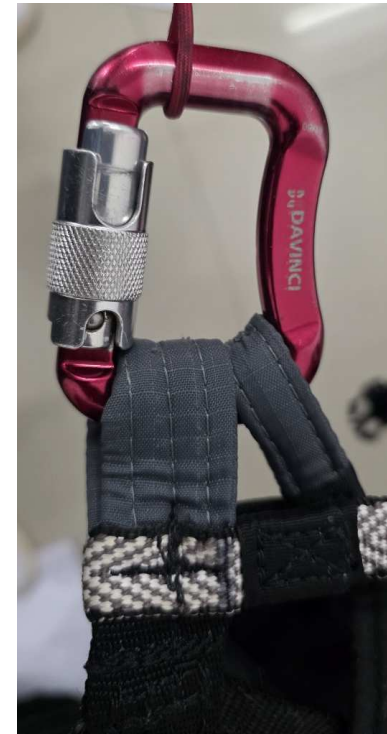

Installing the speed system

- (1) After second pulley, route the line through the metal ring at the bottom edge of the seat
- (2) Connect the line to the speed bar using a secure knot



Rescue Installation and compatibility check

Davinci gliders recommends that rescue installation should be performed by an instructor who has the license of reserve parachute packing. Rescue parachute is a last resort for pilots and can cause death or serious injury if the preparatory parachute is not packed or connected in the right way. The pilot is responsible for ensuring the parachute is properly installed. This harness is compatible with the Davinci Gliders's Comma # lite. The rescue from other manufacturers can also be used, we do not guarantee each function.

The pilot must be responsible for checking compatibility. Whenever a rescue system is first installed on the harness, a qualified paragliding professional instructor should check compatibility. To verify the installation, you need to perform the test at the simulation hanger.

Rescue parachutes should be repacked at least every 6 months

WARNING: If you have any doubts regarding installation, find the expert's advice!

IMPORTANT: You must perform a trial test at the simulator to verify the installation.



Attaching the rescue container bag to the harness rescue parachute handle

The harness includes a rescue parachute handle. The handle must be connected to the rescue container bag. For the connection, you have to check the length of the strap. It must be longer than the connecting plastic pin not being pulled before the strap tightens on the reserve. But it is not so long, the movement may be restricted before the plastic pin exits.

The containers of other manufacturers may have different shape, pin and position. Incorrect installation may cause a deployment failure.

So, we strongly recommend that you have to check contact your dealer or instructor to check the condition of your rescue which is installed like the manual.



THE RESCUE DEPLOYMENT BAG AND THE HARNESS DEPLOYMENT HANDLE

The rescue container for this harness comes with its own deployment handle. This handle and its strap must be connected to the deployment bag of the parachute. In particular, check the length of the strap connecting the rescue deployment handle to the rescue inner container. It should be long enough that the reserve can be extracted without the danger of the pins not being pulled before the strap tightens on the reserve, but not so long that there is excessive slack that extends the movement required for deployment.

The deployment bag of other manufacturers' rescue systems may have different loop positions which may cause a deployment failure. Be sure to contact your parachute dealer or a qualified professional to check the connection, position and secure deployment, and refer to the rescue manual for details. The rescue handle and inner container supplied with the ZERO should already be connected.



Rescue inner bag packing

Your rescue should be repacked into the supplied inner containers as follows.



Connecting the rescue bridle

To connect your rescue to the ZERO harness, we recommend using a Davinci Rescue Carabiner with a minimum breaking strength of 28 kN (2854 kgf). It has more than 10 times of your maximum weight.

Be sure to inspect your connector during normal maintenance and safety checks.

The Harness has a special Bridle installation system.

This system provides the comfort of the pilot when you open the parachute and the condition that the pilot is awarded lower on ground contact. The hanging point is positioned at the back of the shoulder and is designed to combine the advantages of the zipper system with a clean shape than Velcro.

So when you install a parachute, you have to pay more attention to it and set it up in order to fit the order of the pictures. Ensure that the bridles are correctly positioned before use.

Bridle



Rescue



Rescue installation guide

Correct installation of the rescue parachute is extremely important.


Begin by first connecting the bridle and the rescue handle to the rescue parachute (-).

-Set the rescue into the rescue pocket of the harness with the handle connection close to the pilot and the extra rescue bridle and connection lines neatly folded at the bottom of the container. (-)

-Using the line included with your harness pull the built in loops through the metal rings in the order shown in the pictures below

(-)-Zipper up to the end (-) and fold the loose zipper spare only once and cover it with Velcro on the shoulders. (-)!





Adjustments

Adjust your harness to fit your body type and flight style. It is important to adjust correctly so that you can slide easily into the sitting position after takeoff. A misaligned harness can negatively affect the flying characteristics of a paraglider.

Hang on the simulator to make adjustments before the first flight and find the correct settings if necessary during the first few flights.

1. Shoulder straps
2. Lateral Straps
3. Chest Strap
4. Lumbar Strap
5. Leg Straps



(1) Shoulder straps

The optimum setting for the shoulder straps depends on the height of the pilot. Step into the harness and stand upright with the breast strap closed, symmetrically adjust the shoulder straps until they are a snug fit, but not tight.

To tighten: pull down on the BLACK webbing strap(1)

To loosen: pull up on the Black webbing strap(2)



(2) Lateral Straps

The lateral strap can adjust the angle between the thigh and back. Tightening the strap increases the angle, while loosening it decreases the angle. The most comfortable position for yourself is to adjust in flight from calm weather. The attitude of flying in a reclining position reduces the stability of the harness and increases the possibility of riser twist.

To tighten, pull forward on BLACK webbing strap(1)

To loosen, pull back on the BLACK webbing strap(2)



(3) Chest Strap

The adjustment of the chest strap controls the distance between the carabiners and affects the handling and stability of the glider. Widening the distance between the carabiners increases feedback from the wing and allows for easier weight shifting. Closing the strap gives you a more stable feeling in turbulence but increases the risk of entering a stable spiral and also the risk of twisting! The chest strap may also be adjusted in flight according to the conditions; for example, it may be tightened in turbulent air and flown at a looser setting in less turbulent or weaker conditions.

To tighten, pull the black webbing strap to the left.
To loosen, pull the black webbing strap to the right.



(4) Lumbar support

For optimal ergonomic support in the lower lumbar region and adjustment of the sitting depth.


To tighten, pull forward on BLACK webbing strap(1)
To loosen, pull back on the BLACK webbing strap(2)



(5) Leg straps

The correct adjustment of the leg straps allows the pilot to easily reach the sitting position after take-off without using his hands. Use the buckles to adjust the leg straps so that they fit comfortably without being tight; make sure you do it symmetrically. If you need to lengthen the leg straps, first check that the shoulder straps are not too tight.

To tighten, pull the black webbing strap downward.
To loosen, pull the black webbing strap upward.

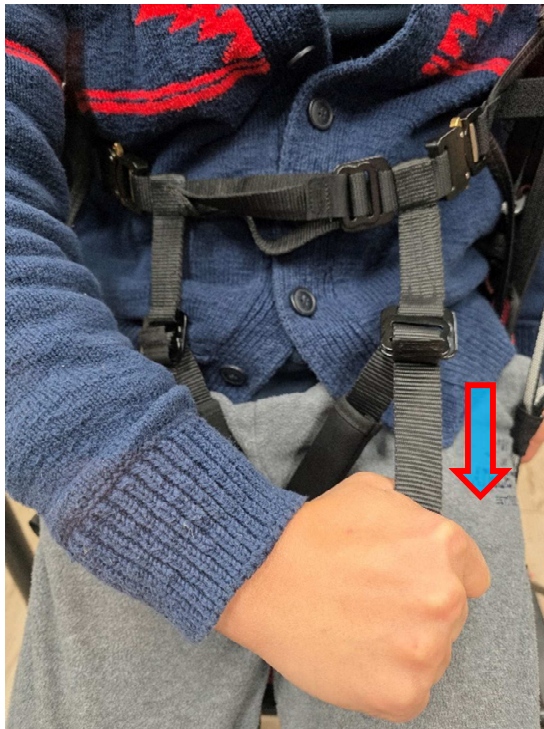

Flying with the ZERO

General warnings and advice

Before every flight, check the following

- ☒ Are you in good physical and mental condition?
- ☒ Are you familiar and compliant with all applicable laws and regulations in your area?
- ☒ Are you briefed thoroughly about the site, airspace and expected weather conditions of the day?
- ☒ Is your equipment and choice of site suitable for your level of experience?
- ☒ Do you have a suitable helmet, gloves, boots, eye-wear and adequate clothing?
- ☒ Are you carrying some form of identification, so that people know who you are in case
- ☒ of an accident? Take along a radio and mobile phone if possible.

Pre-flight checks

As part of your normal pre-flight check routine, check:

- ☒ Is there any damage to the harness or carabiners that could affect its airworthiness?
- ☒ Are all buckles, belts, zips securely fastened? Buckles should click into place as you close them, and a gentle pull on the fastened buckle verifies this. Secure any zips after fastening the buckles. Take extra care in snowy or sandy environments.
- ☒ Is the paraglider connected correctly to the harness with both carabiners secured by their
- ☒ locking mechanisms?
- ☒ Are all pockets closed properly and any loose items tied down safely?



Landing with the ZERO

Before landing, slide your legs forward in the harness so that you adopt the standing position. AVOID landing

in the seated position—it is very dangerous even if you have back protection.

After landing with the ZERO, you have to check the rescue parachute handle which is the right position and whether the rescue is opened.

Miscellaneous

Towing

The ZERO can be used for towing launches. Towing bridge release requires the carabiner to hang directly into the main carabiner with the opening bar facing backwards. For more information, see the documentation provided with the tow release, or contact an authorized tow instructor on the flight site.

Flying over water

The ZERO has foam protection system which has the risk of pilots floating under your head, so you must avoid landing water in any case.

Installation of outer container

You can connect the outer container to the main carabiners with risers.

Protector

Zero Harness includes protection

Be careful not to make a hard landing as ZERO



Maintenance and repairs

The materials used in this harness are composed of the best materials to ensure durability. Nevertheless, in order to ensure the longest possible safe operation, keep the harness as clean and intact as possible.

Care and maintenance

Do not drag the ZERO on rough or rocky ground. Avoid unnecessary exposure to UV, heat and moisture. Store all equipment in a cool, dry place and never store the harness in wet or humid conditions. Use a plastic brush and/or a damp cloth to wipe off dirt regularly. If it becomes excessively dirty, wash it with water and mild soap. First remove the entire subcomponent. Allow the harness to dry naturally in a well-ventilated area, away from direct sunlight. Periodically lubricate the pins and buckles at least once a year with a silicone spray. After hard and harness landing, the seat belt must be checked for damage and make sure the sand does not enter the buckle.

Inspection checklist

The harness should be checked and rescue parachutes should be repacked at least every 6 months. Additional inspections should be carried out after a collision, landing or take-off, or if there are signs of damage or excessive wear. Always find the instructor or dealer's advice in case of doubt. The main aluminium carabiners must be replaced at least every 5 years or after 500 hours, whatever comes first. Impacts may create undetectable cracks that could result in structural failure under continuous load.



Repairs

An authorized DAVINCI Gliders service center Davinci Gliders must carry out all repairs related to the important part of the harness.

This uses the correct material and repair techniques.

Quality and service

We have great pride in the quality of the products produced and strive to correct all problems in the event of manufacturing defects that may affect the safety or function of the equipment. If there is a problem with the equipment, the Davinci dealer should be your first point of contact. If you are unable to contact the dealer

or the importer of the Davinci, contact the Davinci Glider directly through our website (www.flydavinci.com)

Care of the environment

We have the privilege of flying, which is difficult for anyone to enjoy in outstanding nature. Try to respect and preserve nature with minimal environmental impact. When visiting a new area, contact your local club or team in advance for details on environmental concerns and regional limitations.

At the end of the paraglider's life, dispose of it responsibly and follow local regulations



Activate the reserve parachute

It is a good idea to check the position of the reserve parachute handle frequently during flight whenever you can afford it.

By doing so, you will be able to maximize the available reaction time in an emergency situation.

It is necessary to first estimate the altitude above ground level (AGL) and, if high enough, try to return the wing to normal flight. But if you're unsure at all times, deploy your emergency parachute quickly.

The rescue parachute should only be deployed in an emergency situation.

With a strong lateral and vertical pull, pull the handle toward you and then throw the parachute (including container and handle) away into a clear, unobstructed area in the sky.

Pull in as much of the paraglider as possible while the parachute opens and falls. At this point, pull the "C" or "D" riser or toggle/brake toward you as symmetrically as possible.

Prepare to land by standing in an upright position with your knees together and your legs slightly bent.



Materials

Harness		Fabric code
Fabric	Outer	70D Dyneema Ripstop
	Inner	MJ 4RS
Webbing		10 mm HMPE 15mm Dyneema 25mm Polyester noir / HMPE
Thread		210D/9, D/6 Bonded Polyester



An attitude for altitude

53 Shinchon-gil, Okcheon-myeon,
Yangpyeong-gun, Gyeonggi-do,
Republic of Korea

www.flydavinci.com

